


SITE REQUIREMENTS FOR GARAGE DOOR INSTALLATION

-  **INSIDE OF THE GARAGE TO BE CLEAR FROM CONSTRUCTION DEBRIS AND MATERIALS**
-  **MOST DOORS ARE OVER 100kg SO CLOSE ACCESS TO THE GARAGE DOOR OPENING IS ESSENTIAL**
-  **SITE POWER MUST BE WITHIN EASY ACCESS**
-  **WALLS MUST BE CONSTRUCTED FROM SUITABLE MATERIALS TO ALLOWS FOR STRONG FIXING**
-  **CEILING MUST BE SUITABLY CONSTRUCTED TO TAKE THE WEIGHT OF THE DOOR AND MOTOR**
-  **SUSPENDED CEILING NEEDS TO BE SUITIBLY BLOCKED OUT FOR TRACK AND MOTOR FIXING**

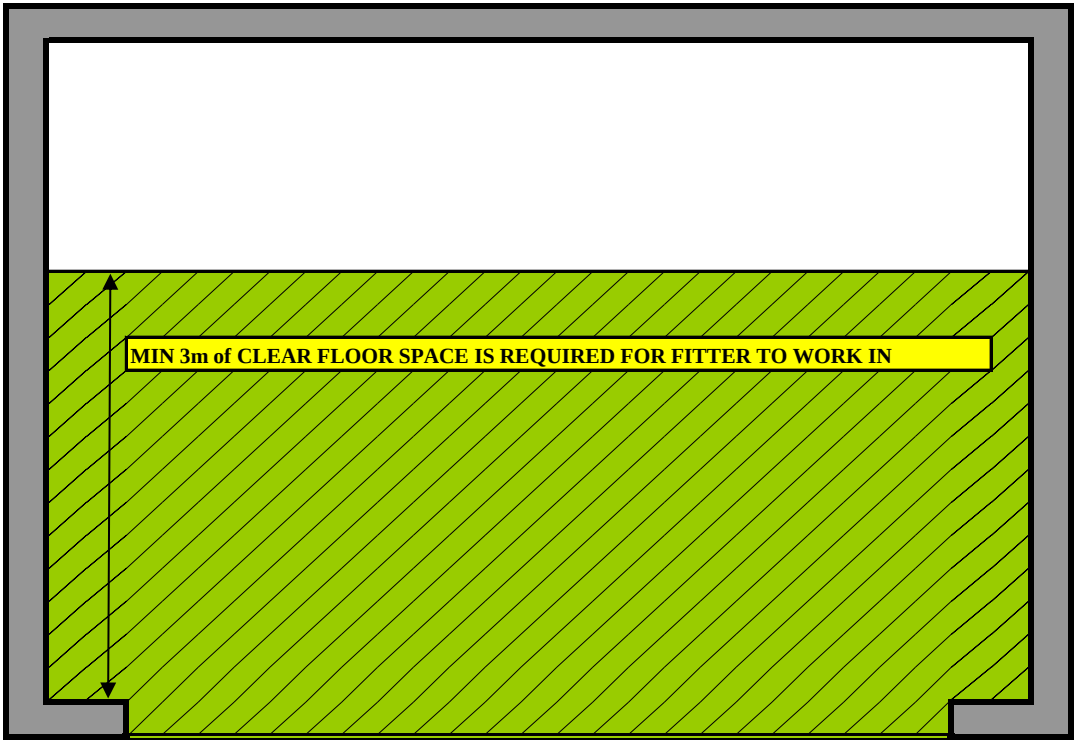

IN ORDER TO COMPLY WITH OCCUPATIONAL HEALTH AND SAFETY REQUIREMENTS IT IS ESSENTIAL THAT ACCESS TO THE GARAGE IS AS CLEAR AND AS CLOSE AS PRACTICALLY POSSIBLE TO REDUCE THE RISK OF BACK INJURY WHEN CARRYING HEAVY DOOR PANELS